


CCWHW

Anneau interne ondulé SPECIFICATIONS IMPERIALES

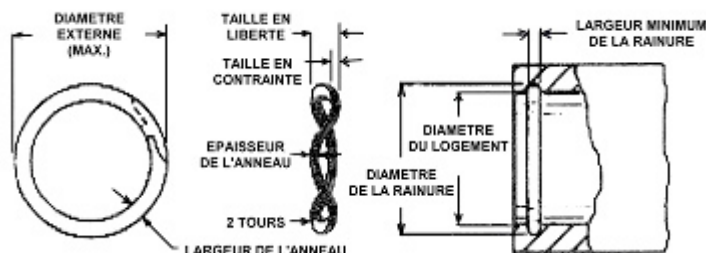

Référence	Diamètre du Logement	Rainure		Pression @ Taille en contrainte	Taille à l'état libre (max.)	Anneau Nombre de Vagues	Epaisseur x Largeur	Compression (Théorique) Newton
		∅	Largeur (mini.)					
CCWHW-075DH	19,050	20,218	3,023	111 @ 2,032	2,896	3	0,889 x 1,651	4635
CCWHW-087DH	22,225	23,647	2,921	133 @ 2,159	2,794	3	1,067 x 2,159	8896
CCWHW-100DH	25,400	27,076	3,175	151 @ 2,159	3,048	3	1,067 x 2,159	6050
CCWHW-112DH	28,575	30,404	3,302	169 @ 2,540	3,175	3	1,270 x 3,251	11267
CCWHW-125DH	31,750	33,782	3,556	178 @ 2,540	3,429	3	1,270 x 3,251	8896
CCWHW-137DH	34,925	37,109	3,302	200 @ 2,540	3,175	4	1,270 x 3,251	16681
CCWHW-150DH	38,100	40,488	3,556	222 @ 2,540	3,429	4	1,270 x 3,251	14826
CCWHW-162DH	41,275	43,815	3,556	245 @ 2,794	3,429	4	1,575 x 4,013	24465
CCWHW-175DH	44,450	47,193	3,683	267 @ 2,794	3,556	4	1,575 x 4,013	19065
CCWHW-187DH	47,625	50,013	3,708	280 @ 2,794	3,581	4	1,575 x 4,013	14750
CCWHW-200DH	50,800	53,899	3,937	289 @ 2,794	3,810	4	1,575 x 4,013	12046
CCWHW-212DH	53,975	57,175	4,445	311 @ 3,302	4,318	4	1,981 x 4,775	23954
CCWHW-225DH	57,150	60,503	4,572	334 @ 3,302	4,445	4	1,981 x 4,775	20853
CCWHW-237DH	60,325	63,932	4,699	356 @ 3,302	4,572	4	1,981 x 4,775	16948
CCWHW-250DH	63,500	67,259	4,775	374 @ 3,302	4,648	4	1,981 x 4,775	14372
CCWHW-262DH	66,675	70,637	5,715	394 @ 4,318	5,588	4	2,362 x 5,715	26098
CCWHW-275DH	69,850	74,016	5,944	418 @ 4,318	5,817	4	2,362 x 5,715	22005
CCWHW-287DH	73,025	77,495	5,842	431 @ 4,318	5,715	4	2,362 x 5,715	18758
CCWHW-300DH	76,200	80,823	5,969	445 @ 4,318	5,842	4	2,362 x 5,715	16476
LES ANNEAUX ÉNUMÉRÉS CI-DESSOUS SONT EXCENTRÉS								
CCWHW-312DH	79,375	84,201	6,477	458 @ 4,699	6,350	4	2,819 x 7,137	32725
CCWHW-325DH	82,550	87,528	6,477	472 @ 4,699	6,350	4	2,819 x 7,137	29469
CCWHW-350DH	88,900	94,234	6,350	512 @ 4,699	6,223	4	2,819 x 7,137	22241
CCWHW-362DH	92,075	97,561	6,350	520 @ 4,699	6,350	4	2,819 x 7,137	20017
CCWHW-375DH	95,250	100,940	6,604	538 @ 4,699	6,477	4	2,819 x 7,925	21529
CCWHW-387DH	98,425	104,318	6,731	560 @ 4,699	6,604	4	2,819 x 7,925	18682
CCWHW-400DH	101,600	107,696	6,604	578 @ 4,699	6,477	4	2,819 x 7,925	16521
CCWHW-412DH	104,775	110,871	6,680	596 @ 4,699	6,553	4	2,819 x 7,925	15684
CCWHW-425DH	107,950	114,046	6,833	623 @ 4,699	6,706	4	2,819 x 7,925	14154
CCWHW-450DH	114,300	120,396	6,477	667 @ 4,699	6,350	5	2,819 x 7,925	37067
CCWHW-475DH	120,650	126,873	6,528	712 @ 4,699	6,401	5	2,819 x 7,925	30942
CCWHW-500DH	127,000	133,604	6,401	756 @ 4,699	6,274	5	2,819 x 7,925	27005

A noter :

- les spécifications américaines en inches ont été converties en mm.
- les anneaux ondulés sont en acier au carbone ; pour de l'inco 17/7PH, rajouter le suffixe S17.

Tél. : 01 43 81 87 06 / Fax : 01 43 08 79 20 / Mail : commercial@miltechinternational.fr
CCWHW Miltech International www.miltechinternational.fr

